

# ON-PREMISES SOFTMOUNT WASHER EXTRACTOR

PYN180

180lb

PYN  
RANGE



## FEATURES

- Freestanding, high spin, 350 G-Force
- Stainless steel top, front, and side panels
- Stainless steel cylinder and tub
- XControl+ – fully programmable control
- Large dual drain valves
- Large door opening for easy loading and unloading
- SuperWash<sup>®</sup> perforated lifting ribs create more mechanical action
- SuperEco washing programs significantly reduce water and electricity consumption
- Warranty: First three years on all parts; First five years frame and cylinder shaft assembly; First five years on cylinder bearings and bearing seals (parts only)

## OPTIONS

- Steam heating



ROBUST DESIGN



EXTRA LARGE  
DOOR



LARGE DRAIN  
VALVE CYCLES




3 YEAR PARTS  
WARRANTY

**Coinamatic**<sup>™</sup>  
Commercial Laundry • CCL

*Ideas for the future. Answers for today.*<sup>®</sup>

1.877.755.5302 | [www.coinamatic.com](http://www.coinamatic.com)

<b>MODEL</b>		PYN180	
<b>CONTROL OPTION</b>		XControl+	
<b>CAPACITY - lb (kg)</b>		180 (82)	
<b>DIMENSIONS W/ TILT - in (mm)</b>		<b>Width</b>	63.78 (1620)
		<b>Depth</b>	78.46 (1993)
		<b>Height</b>	83.39 (2118)
<b>NET WEIGHT W/ TILT - lb (kg)</b>		6592 (2990)	
<b>DIMENSIONS W/O TILT - in (mm)</b>		<b>Width</b>	58.86 (1495)
		<b>Depth</b>	76.38 (1940)
		<b>Height</b>	78.5 (1994)
<b>NET WEIGHT W/O TILT - lb (kg)</b>		5820 (2640)	
<b>CYLINDER DIAMETER - in (mm)</b>		43.7 (1110)	
<b>CYLINDER DEPTH - in (mm)</b>		33 (838)	
<b>CYLINDER VOLUME - cu. ft ( liters)</b>		28.5 (807)	
<b>DOOR OPENING SIZE - in (mm)</b>		20.86 (530)	
<b>DOOR BOTTOM TO FLOOR - in (mm)</b>		33.15 (842)	
<b>WASH SPEED - RPM</b>		36	
<b>EXTRACT SPEED - RPM</b>		750	
<b>EXTRACT G-FORCE</b>		350	
<b>WATER INLET CONNECTION - in (mm)</b>		3 x 1.5 (38)	
<b>STEAM INLET CONNECTION - in (mm)</b>		1 (25)	
<b>DRAIN CONNECTION - in (mm)</b>		2 x 4 (102)	
<b>MOTOR POWER CONSUMPTION - hp (kw)</b>		14.75 (11)	
<b>VOLTAGE/CIRCUIT BREAKER - FLA</b>		208-240/60/3	40-30.2
		400-480/60/3	30-23.8
<b>SHIPPING DIMENSIONS APPROX. W/ TILT - in (mm)</b>		<b>Width</b>	70.01 (1778)
		<b>Depth</b>	84.65 (2150)
		<b>Height</b>	91.54 (2325)
<b>SHIPPING WEIGHT W/ TILT - lb (kg)</b>		6614 (3000)	
<b>SHIPPING DIMENSIONS APPROX. W/O TILT - in (mm)</b>		<b>Width</b>	66.53 (1690)
		<b>Depth</b>	76.77 (1950)
		<b>Height</b>	86.61 (2200)
<b>SHIPPING WEIGHT W/O TILT - lb (kg)</b>		6239 (2830)	
<b>AGENCY APPROVALS</b>		CSA	

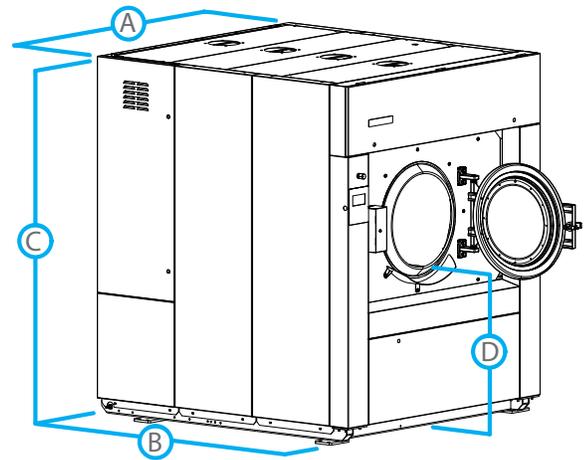

DIMENSIONS W/ TILT		PYN180
A.	OVERALL WIDTH - in (mm)	63.78 (1620)
B.	OVERALL DEPTH - in (mm)	78.46 (1993)
C.	OVERALL HEIGHT - in (mm)	83.39 (2118)
D.	DOOR BOTTOM TO FLOOR - in (mm)	33.15 (842)

DIMENSIONS W/O TILT		PYN180
A.	OVERALL WIDTH - in (mm)	58.86 (1495)
B.	OVERALL DEPTH - in (mm)	76.38 (1940)
C.	OVERALL HEIGHT - in (mm)	78.5 (1994)
D.	DOOR BOTTOM TO FLOOR - in (mm)	13.74 (349)