

ON-PREMISES SOFTMOUNT WASHER EXTRACTOR

PYN25

25lb

PYN
RANGE




FEATURES

- Freestanding, high spin, 400 G-Force
- Stainless steel top, front, and side panels
- Stainless steel cylinder and tub
- Patented Cascade™ cylinder for better washability
- XControl+ – fully programmable control
- Patented soap hopper
- Large drain valve
- Front access to vital parts for easy maintenance
- Large door opening for easy loading and unloading
- USB plug on the back panel and control board
- Warranty: First three years on all parts; First five years frame and cylinder shaft assembly; First five years on cylinder bearings and bearing seals (parts only)

OPTIONS

- Third water inlet
- Steam heating

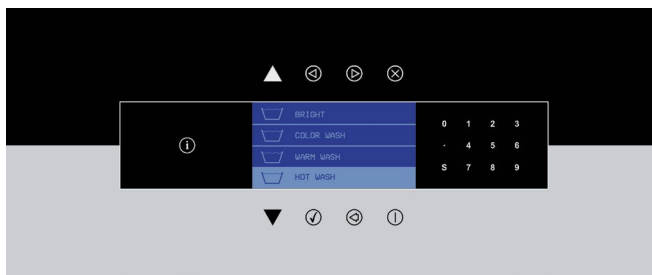

ERGONOMICAL
CONSTRUCTION



LARGE DOOR
OPENING



LOW WATER
AND ENERGY
CONSUMPTION



3 YEAR PARTS
WARRANTY

Coinamatic[™]
Commercial Laundry • CCL

Ideas for the future. Answers for today.[®]

1.877.755.5302 | www.coinamatic.com

MODEL	PYN25	
CONTROL OPTION	XControl+	
CAPACITY - lb (kg)	25 (11)	
OVERALL WIDTH - in (mm)	31.29 (795)	
OVERALL DEPTH - in (mm)	31.29 (795)	
OVERALL HEIGHT - in (mm)	48.22 (1225)	
CYLINDER DIAMETER - in (mm)	24.4 (620)	
CYLINDER DEPTH - in (mm)	13.78 (350)	
CYLINDER VOLUME - cu. ft (liters)	3.7 (105)	
DOOR OPENING SIZE - in (mm)	16.14 (410)	
DOOR BOTTOM TO FLOOR - in (mm)	13.46 (342)	
WASH SPEED - RPM	49	
EXTRACT SPEED - RPM	1075	
EXTRACT G-FORCE	400	
WATER INLET CONNECTION - in (mm)	2 x 0.75 (19)	
STEAM INLET CONNECTION - in (mm)	0.5 (13)	
DRAIN CONNECTION - in (mm)	3 (76)	
FLOOR TO DRAIN OUTLET CENTER - in (mm)	4.4 (112)	
SIDE TO DRAIN OUTLET CENTER - in (mm)	9.05 (230)	
MOTOR POWER CONSUMPTION - hp (kw)	1.48 (1.10)	
VOLTAGE/CIRCUIT BREAKER - FLA	208-240/60/1	15-9.8
SHIPPING DIMENSIONS APPROX. - in (mm)	Width	32.87 (835)
	Depth	33.01 (838)
	Height	52.95 (1345)
NET WEIGHT - lb (kg)	463 (210)	
SHIPPING WEIGHT - lb (kg)	518 (235)	
AGENCY APPROVALS	cCSAus	

DIMENSIONS	PYN25
A. OVERALL WIDTH - in (mm)	31.29 (795)
B. OVERALL DEPTH - in (mm)	31.29 (795)
C. OVERALL HEIGHT - in (mm)	48.22 (1225)
D. DOOR BOTTOM TO FLOOR - in (mm)	13.46 (342)

