

ON-PREMISES SOFTMOUNT WASHER EXTRACTOR

PYN90

90lb





FEATURES


- Freestanding, high spin, 350 G-Force
- Stainless steel front and side panels
- Stainless steel cylinder and tub
- XControl+ fully programmable control
- Up front five cup soap hopper
- Large dual drain valves
- Large door opening for easy loading and unloading
- SuperWash[®] perforated lifting ribs create more mechanical action
- SuperEco washing programs significantly reduce water and electricity consumption
- Ozone compatible seal system
- Warranty: First three years on all parts; First five years frame and cylinder shaft assembly; First five years on cylinder bearings and bearing seals (*parts only*)

OPTIONS

- Steam heating

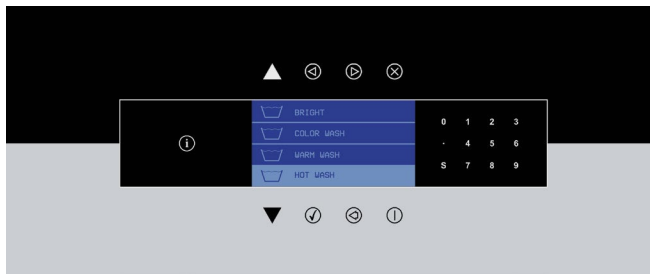

ROBUST DESIGN



EXTRA LARGE
DOOR



LARGE DRAIN
VALVE CYCLES



3 YEAR PARTS
WARRANTY

MODEL	PYN90	
CONTROL OPTION	XControl+	
CAPACITY - lb (kg)	90 (41)	
OVERALL WIDTH - in (mm)	47.04 (1195)	
OVERALL DEPTH - in (mm)	56.3 (1430)	
OVERALL HEIGHT - in (mm)	75 (1905)	
CYLINDER DIAMETER - in (mm)	36 (914)	
CYLINDER DEPTH - in (mm)	24 (610)	
CYLINDER VOLUME - cu. ft (liters)	14.2 (402)	
DOOR OPENING SIZE - in (mm)	21.3 (541)	
DOOR BOTTOM TO FLOOR - in (mm)	28.74 (730)	
WASH SPEED - RPM	38	
EXTRACT SPEED - RPM	830	
EXTRACT G-FORCE	350	
WATER INLET CONNECTION - in (mm)	3x1 (25)	
STEAM INLET CONNECTION - in (mm)	0.75 (19)	
DRAIN CONNECTION - in (mm)	2x3 (76)	
MOTOR POWER CONSUMPTION - hp (kw)	10.06 (8)	
VOLTAGE/CIRCUIT BREAKER - FLA	220-240/60/3	25.4/40
	380-480/60/3	14.6/20
SHIPPING DIMENSIONS APPROX. - in (mm)	Width	56.3 (1430)
	Depth	61.8 (1570)
	Height	82.9 (2106)
NET WEIGHT - lb (kg)	3439 (1560)	
SHIPPING WEIGHT - lb (kg)	3748 (1700)	
AGENCY APPROVALS	cCSAus	

DIMENSIONS	PYN90
A. OVERALL WIDTH - in (mm)	47.04 (1195)
B. OVERALL DEPTH - in (mm)	56.3 (1430)
C. OVERALL HEIGHT - in (mm)	75 (1905)
D. DOOR BOTTOM TO FLOOR - in (mm)	28.74 (730)

