


PUSH-TO-START

COMMERCIAL REAR CONTROL SINGLE DRYER – CANADA

Built for Reliable Performance

Huebsch®'s push-to-start single load dryer combines heavy-duty construction with reliable operation proven to stand the test of time. They're designed with less moving parts for one reason: so you'll face fewer maintenance problems and less wear and tear down the road. Our cabinet design maintains the perfect balance of heat, airflow and tumble action for optimal performance and efficiency. The equipment provides an advantage on such issues as energy conservation, equipment breakdowns and vandalism. The dry cycle is efficient and fast. Customers have the flexibility to choose from four heat/cycle selections.

- Industry's largest door opening 2.06 sq. ft. (1914 cm²)
- Quiet, efficient blower system
- Door is reversible for installation flexibility
- High efficiency exhaust blower with superior airflow 220 cfm (105 liters/sec)
- 100% serviceable from the front
- Space-saving narrow cabinet 26.875" (683 mm)
- Upfront lint filter easy to clean and secured
- Durable galvanized steel cylinder

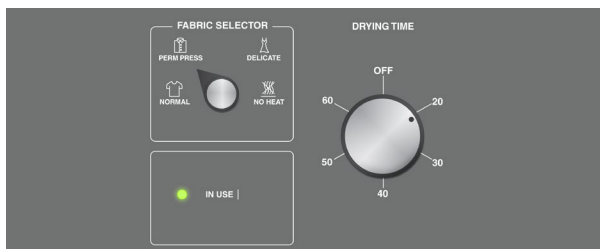


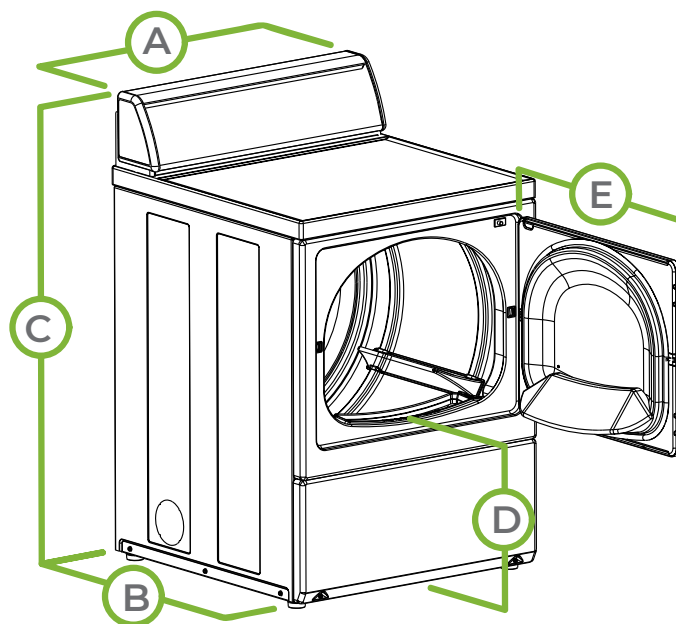
Push-to-Start control provides easy to start activation indicated by "In Use" light.

SPECIFICATIONS

COMMERCIAL REAR CONTROL SINGLE DRYER – CANADA

MODEL - see below for all models and activation available		
CONTROL OPTION		Push-to-Start
COLOR		White
CAPACITY - lb (kg)		18 (8.2)
CYLINDER VOLUME - cu. ft. (liters)		7.0 (198)
MOTOR (THERMAL PROTECTED)		0.33 HP
TYPE OF GAS (GAS MODELS ONLY)		Factory equipped natural/mixed gas
AIR OUTLET DIAMETER - in (mm)		4 (102)
EXHAUST AIRFLOW - cfm (liters/sec)		220 (105)
CYCLE SELECTIONS		Normal, Perm Press Delicate, No Heat
ELECTRICAL REQUIREMENTS	■ Electric	120/240/60/1-30 amp
	Gas	120/60/1-15 amp
HEATING ELEMENT	Electric	5000W, 240V
	Gas	25,000 Btu
NET WEIGHT - lb (kg)	Electric	150 (68)
	Gas	150 (68)
SHIPPING WEIGHT lb (kg)	Electric	161 (73)
	Gas	161 (73)
SHIPPING DIMENSIONS APPROX. - in (mm)	Width	30.5 (775)
	Depth	29.5 (762)
	Height	45 (1143)
AGENCY APPROVALS	Electric	cULus
	Gas	cCSAus

MODELS	VOLTAGE/FREQ/PH	ACTIVATION	
HDEMNRGS173CW01	120/240/60/1	Electric	
HDGMNRGS113CW01	120/60/1	Gas	



A.	OVERALL WIDTH - in (mm)	26.875 (683)
B.	OVERALL DEPTH - in (mm)	28 (711)
C.	OVERALL HEIGHT - in (mm)	43 (1092)
D.	FLOOR TO DOOR OPENING -in (mm)	15.44 (392)
E.	DOOR SWING - in (mm)	23.5 (597)

■ Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems are registered to ISO 9001.