HUEBSCH MULTI-HOUSING

QUANTUM® GOLD COIN DROP INSTALLED, PREP FOR COIN

COMMERCIAL TOP LOAD WASHER PEAK PERFORMANCE – CANADA

Built for Reliable Performance

Huebsch®'s two-speed top load washer, defined by its simplicity and its performance, provides everything you need to get the job done – and nothing you don't. Huebsch's top load washer combines heavy-duty construction with reliable operation proven to stand the test of time. Huebsch® washers provide maximum energy efficiency and long-lasting performance.

- Touch pad control with sound annunciator
- 27 cycle selections
- Extract speed of 710 RPM spins clothes out drier
- Integrated meter case
- Advanced suspension system
- Easy-to-read digital display
- · Cycle programming flexibility
- · Multi-level vend pricing
- Individual cycle modifier keys
- · Durable stainless steel tub standard
- 2.83 cu. ft. (80.14 liters) wash capacity
- · Large capacity meter case standard
- Wash Alert[™] capability






The cutting edge Quantum® control system from Huebsch® gives you the freedom to manage laundry your way with the power to achieve unmatched levels of revenue. Quantum Gold provides users with additional cycle choices while offering new options to help lower operating costs and incorporates tools and options to increase revenue.



SPECIFICATIONS

COMMERCIAL TOP LOAD WASHER PEAK PERFORMANCE – CANADA

MODEL - see below for all models and activation available			
CONTROL OPTION		Quantum Gold	
COLOR		White	
CAPACITY - lb (kg)		14 (6.4)	
OVERALL WIDTH - in (mm)		25.63 (651)	
OVERALL DEPTH - in (mm)		28 (711)	
OVERALL HEIGHT - in (mm)		43 (1092)	
CYLINDER VOLUME - cu. ft. (liters)		2.83 (80.14)	
SPIN SPEED G-FORCE (RPM)		150 (710)	
MOTOR SIZE - HP (kw)		0.5 (0.37)	
WATER CONSUMPTION PER CYCLE - g (liter)		24.9 (94.3)	
IWF (WATER FACTOR) - gal/ft³ (liters/liter/cycle)		8.8 (1.18)	
MEF ₁₂ (Modified Energy Factor) ft³/kWh/cycle (Liters/kWh/cycle)		1.35 (38.2)	
AVAILABLE WATER TEMPERATURES		Hot, Warm, Cold	
AVAILABLE CYCLES		Normal, Perm Press, Delicates	
ELECTRICAL REQUIREMENTS (v/Hz/Ph-Amp)		120/60/1 - 15 Amp	
WATER PRESSURE - p.s.i. (bar)		20-120 (1.4/8.3)	
DRAIN		Pump	
CYLINDER FINISH		Stainless Steel	
NET WEIGHT - lb (kg)		206 (93.4)	
SHIPPING WEIGHT - lb (kg)		218 (98.8)	
	Width	28 (711)	
SHIPPING DIMENSIONS APPROX in (mm)	Depth	30 (762)	
	Height	45 (1143)	
AGENCY APPROVALS		cULus	

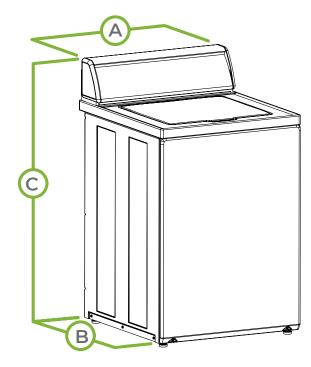

Α.	OVERALL WIDTH - in (mm)	25.625 (651)
B.	OVERALL DEPTH - in (mm)	28 (711)
C.	OVERALL HEIGHT - in (mm)	43 (1092)

MODELS	ACTIVATION	
HWNNE2HP115CW01	Coin Drop Installed	
HWNNX2HP115CW01	Prep for Coin	11

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems are registered to ISO 9001.