

# HUEBSCH MULTI-HOUSING


QUANTUM® GOLD PRO PREP FOR CARD, PREP FOR COIN

## COMMERCIAL STACK DRYER – CANADA SOLID DOOR

### Built for Reliable Performance

Huebsch®'s stack dryer offers the same great features as the single load dryer. Two commercial dryers in the space of one, both operating independently, including independent controls for optimum usage. Defined by its simplicity and its performance, Huebsch provides everything you need to get the job done - and nothing you don't. Huebsch's stack dryer combines heavy-duty construction with reliable operation proven to stand the test of time. They're designed with less moving parts for one reason: so you'll face fewer maintenance problems and less wear and tear down the road. Huebsch's dryers provide the perfect balance of heat, airflow and tumble action for optimal performance and efficiency. Bottom dryer is ADA compliant.

- Integrated meter case
- Industry's largest door opening 2.06 sq. ft. (1914 cm<sup>2</sup>)
- Quiet, efficient blower system
- High efficiency exhaust blower with superior airflow 220 cfm (105 liters/sec)
- 100% serviceable from the front
- Space-saving narrow cabinet 26.875" (683 mm)
- Upfront lint filter easy to clean and secured
- Durable galvanized steel cylinder
- Large capacity meter case standard

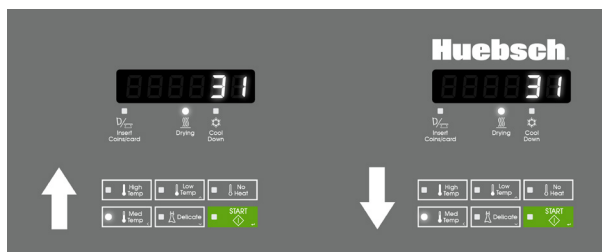





The Quantum® Gold Pro control delivers a truly premium experience to residents. From intuitive soft touch buttons that walk them through cycle options to multiple actuations (coin, card, mobile) for payment flexibility, this control gives residents the wash and dry options they want, and the revenue potential managers desire.




SPECIFICATIONS

# COMMERCIAL STACK DRYER – CANADA SOLID DOOR

MODEL - see below for all models and activation available		
CONTROL OPTION	Quantum Gold Pro	
COLOR	White	
CAPACITY - lb (kg)	18 (8.2) ea	
OVERALL WIDTH - in (mm)	26.875 (683)	
OVERALL DEPTH - in (mm)	28 (711)	
OVERALL HEIGHT - in (mm)	78.17 (1986)	
CYLINDER VOLUME - cu. ft. (liters)	7.0 (198) ea	
MOTOR (THERMAL PROTECTED)	0.33 HP	
TYPE OF GAS (GAS MODELS ONLY)	Factory Equipped Natural	
AIR OUTLET DIAMETER - in (mm)	4 (102)	
EXHAUST AIRFLOW - cfm (liters/sec)	220 (105)	
AVAILABLE CYCLES	High, Medium, Low, Delicates, No Heat	
ELECTRICAL REQUIREMENTS	Electric	208-240/60/1-60 amp
	Gas	120/60/1-20 amp
HEATING ELEMENT	Electric	5000W, 240V 4250W, 208V
	Gas	25,000 Btu
SHIPPING DIMENSIONS APPROX. - in (mm)	Width	33 (838)
	Depth	30 (762)
	Height	80 (2032)
NET WEIGHT - lb (kg)	Electric	270 (122)
	Gas	270 (122)
SHIPPING WEIGHT - lb (kg)	Electric	280 (127)
	Gas	280 (127)
AGENCY APPROVALS	Electric	cULus
	Gas	cCSAus

MODELS	VOLTAGE/FREQ/PH	ACTUATION	
HSENXAGS286CW01	208-240/60/1	Electric	Prep for Coin 
HSGNXAGS096CW01	120/60/1	Gas	Prep for Coin 
HSENYAGS286CW01	208-240/60/1	Electric	Prep for Card 
HSGNYAGS096CW01	120/60/1	Gas	Prep for Card 

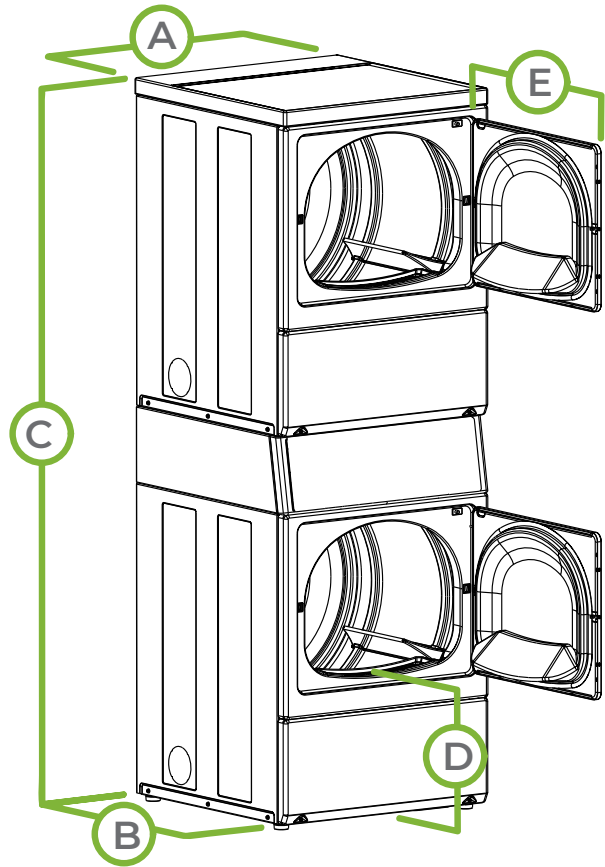

A.	OVERALL WIDTH - in (mm)	26.875 (683)
B.	OVERALL DEPTH - in (mm)	28 (711)
C.	OVERALL HEIGHT - in (mm)	78.17 (1986)
D.	FLOOR TO DOOR OPENING - in (mm)	15.44 (392)
E.	DOOR SWING - in (mm)	23.5 (597)

◆ NOTE: Each stack dryer requires a single inlet power supply circuit.

■ Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit. Electric dryers come equipped for 208-240/60/1 operation.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems are registered to ISO 9001.

**Commercial product is not authorized for sale to Residential end consumers.**