ON-PREMISES PREMIUM SINGLE TUMBLE DRYER



PT030





XQ Control

FEATURES

- Easy-to-use digital control
- · Electric, gas and steam heating
- Large door opening for easy loading and unloading
- Galvanized cylinder
- Axial airflow
- Large self-cleaning lint screen
- Fits through 36" door opening

OPTIONS

- Reversing cylinder to avoid tangling of large items
- · Stainless steel cylinder
- Stainless steel front panel
- Sensodry+[®] over-dry prevention technology lowers energy, utility and linen replacement costs
- SafeTech[™] Fire Suppression System, a multi-port water manifold system, will saturate linens in an unlikely event of fire within the cylinder







FAST DRYING

EASY OPERATION


SERVICE FRIENDLY



Dual Digital Control



MODEL	PT030
CONTROL OPTION	XQ, DDC
CAPACITY - Ib (kg)	30 (14)
OVERALL WIDTH - in (mm)	28 (711)
OVERALL DEPTH - in (mm)	46.87 (1190)
OVERALL HEIGHT - in (mm)	63.87 (1622)
CYLINDER DIAMETER - in (mm)	26.5 (673)
CYLINDER VOLUME - cu. ft (liters)	9.6 (272)
DOOR OPENING SIZE - in (mm)	22.69 (576)
ENERGY DATA Steam Models - 100 psi	134,700 Btu/hr
Electric Models	21 kW
EXHAUST - in (mm)	6 (152)
GAS CONNECTIONS - in (npt)	0.5
STEAM CONNECTIONS - in (npt)	0.75
MOTOR - hp Fan	0.25
Drive	0.25
DRYING AVERAGE Gas Heating	0.57
- lbs/min Electric Heating	0.6
AIRFLOW - cfm	500
ELECTRIC SPECS - amps	Non Rev (Rev)
GAS & STEAM 100/200-220/60/1 2W+G	11.0/5.8
120/208-240/60/1 2W/3W+G	12.0/6.7
200-208/240/60/3 3W+G	3.2/3.2 (4.0/4.0)
380/60/3 3W+G	1.5 (2.0)
440/60/3 3W+G	1.6 (2.0)
460-480/60/3 3W+G	1.6 (2.0)
ELECTRIC 208/60/1 3W+G	108
240/60/1 3W+G	94
200/60/1 2W+G	108
200-208/60/3 3W+G	62 (62)
240/60/3 3W+G	54 (54)
380/60/3 3W+G	33 (33)
440/60/3 3W+G	29 (29)
460-480/60/3 3W+G	27 (27)
SHIPPING DIMENSIONS APPROX. Width	30 (762)
- in (mm) Depth	49 (1245)
Height	69 (1753)
NET WEIGHT - lb (kg)	330 (150)
SHIPPING WEIGHT - lb (kg)	364 (165)
AGENCY APPROVALS	cCSAus

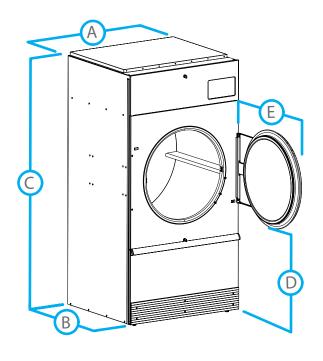

DIM	IENSIONS	PT030
A.	OVERALL WIDTH - in (mm)	28 (711)
В.	OVERALL DEPTH - in (mm)	46.87 (1190)
C.	OVERALL HEIGHT - in (mm)	63.87 (1622)
D.	DOOR BOTTOM TO FLOOR - in (mm)	27.5 (669)
E.	DOOR SWING - in (mm)	26.25 (667)

